BKRUF241P

24" Panel-Ready Undercounter Beverage Center

BENESSI





PRINCIPAL FEATURES

- Aisi 304 stainless steel body
- Stainless steel interior finish
- Aisi 304 stainless steel anti-bacterial interior
- Optiview: multi - LED light array (top interior) provides excellent illumination to the entire interior
- Soft close door and drawers in all compartments
- Full color TFT smart display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isolated variable speed compressor maintains temperature with low vibration
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- One indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Chill to serve: you can rapidly lower the temperature to 2°C before serving.
- Fully integrated / custom panel ready
- Bronzed glass door and Argon gas guarantee maximun protection from harmful UV light rays.
- Reversible door.
- Low vibration compressor
- Full range of models and configurations.Can easily be combined and configured with other Benessi fridge, freezer, wine cellar models to fit your kitchen needs.

TECHNICAL DETAILS

Total Absorbed Current (A)	1.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length (in)	118 1/8" (3 m)
Plug Type	NEMA 5-15P 125V; 15A (Type B)
Climatic Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A

GENERAL PROPERTIES

Reversible door	YES
Equilance hinge	NO
Soft-Closing glides	YES
Low vibration	YES
OptiView (Led Light Spots)	YES
Shelves	2
Type Of Shelves	GLASS
Full Extension Shelves 90° Door Opening	YES
Full Extension Drawers 90° Door Opening	NO
Defrost Process	AUTOMATIC
Door Open Alarms	YES
Shopping Fridge	NO
Shopping Freezer	NO
Power Failure Alert	YES
Ice Maker With Water Filter	NO
Humidity control	NO
Active carbon filter	YES
Air filter control	YES
Volume Compartment 1 (cbf)	5.1
Total Net Volume (cbf)	5.1
Total Gross Volume (cbf)	5.1
Compartment 1 / Upper wine cellar capacity (bottles)	23
Undercounter glass shelf capacity (cans)	42
Undercounter bottom wooden bottle holder (bottles)	11
Estimated Yearly Electricity Use	242 kwh

TEMPERATURE RANGES

Climatic compartments	3
Temperature ranges	N/A

DIMENSIONS & WEIGHT


Height Of The Product (Minimum)	34" (865 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	23 1/2" (598 mm)
Depth Of Product Without Handle	22 1/2" (572 mm)
Cut-out Height	34 1/4" (870 mm)
Cut-out Width	23 5/8" (600 mm)
Cut-out Depth	min 23 5/8" (600 mm) + panel thickness for flush install
Net Weight	121 lbs (55 kg)
Gross Weight	154 lbs (70 kg)

BKRUF241P

24" Panel-Ready Undercounter Beverage Center


BENESSI

PRODUCT SPECIFICATIONS AND DIMENSIONS

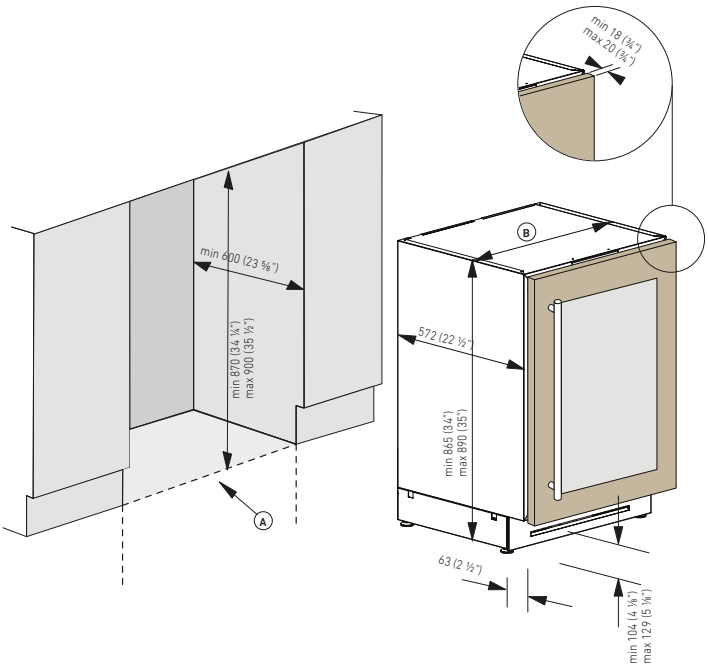



TECHNICAL DATA	
Niche Width **A** (mm)	23 5/8"
Unit Width **B** (mm)	23 1/2"

FRONT VIEW

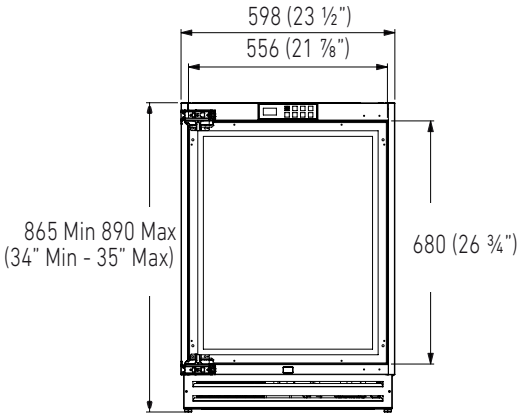

SIDE VIEW

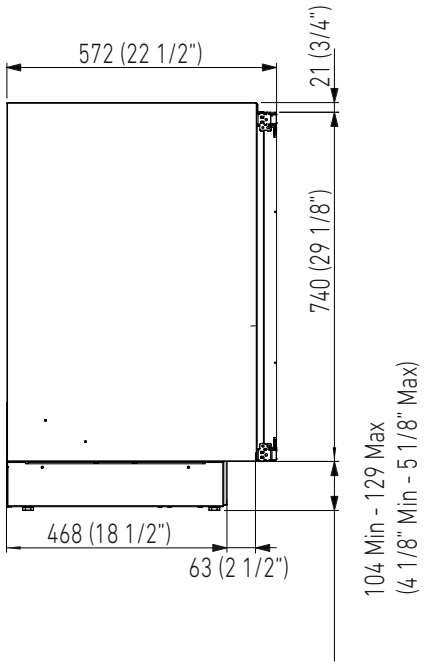

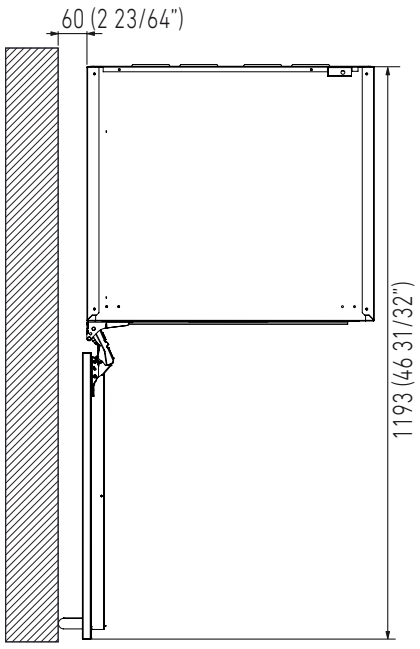

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.


Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

BKRUF241P

24" Panel-Ready Undercounter Beverage Center

BENESSI

CUSTOM PANELS INFORMATION

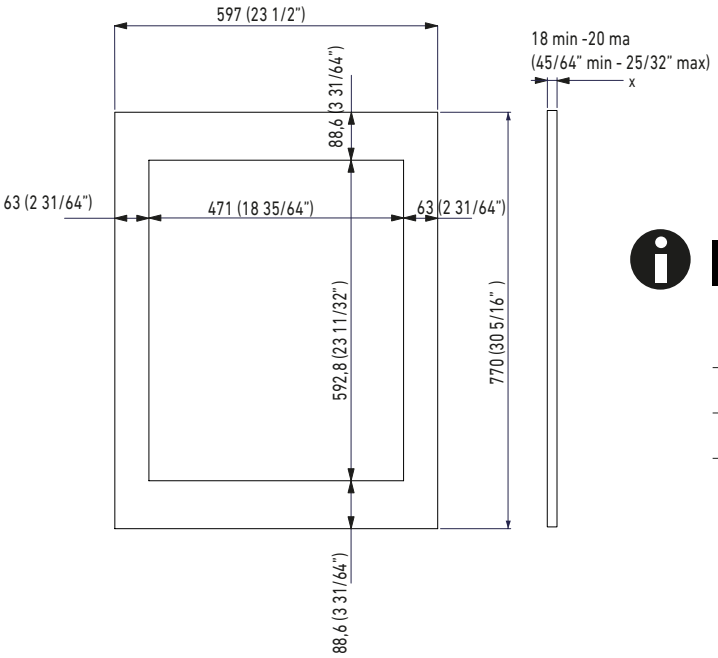


INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 3/4" in (18 mm) and 3/4" in (20 mm)


Door Panels Weight Max	22 lbs (10 kg)
Drawer Panels Weight Max	N/A lbs (N/A kg)

ELECTRICAL CONNECTION

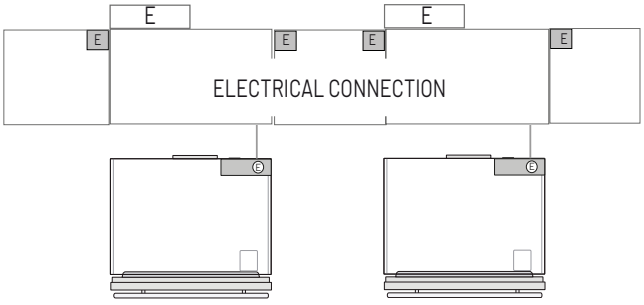

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

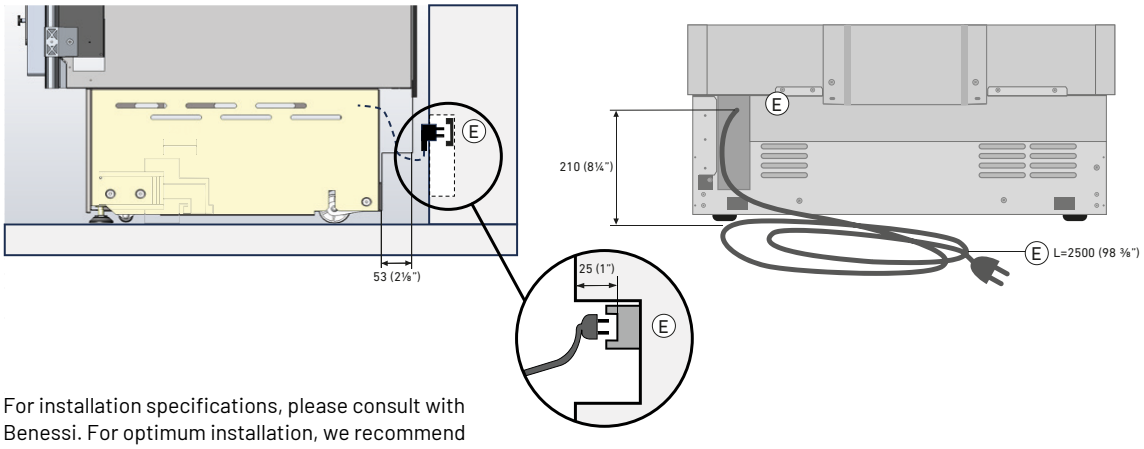

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.