BKRUW242SS 24" undercounter wine cellar with Stainless Steel Door

BENESSI





PRINCIPAL FEATURES

- Aisi 304 stainless steel body
- Stainless steel interior finish
- Aisi 304 stainless steel anti-bacteria interior
- Optiview: multi - LED light array (top interior) provides excellent illumination to the entire interior
- Soft close door
- Full color TFT smart display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Insulated variable speed compressor maintains temperature with low vibration
- Sabbath mode
- Front and rear adjustable feet up to 25 mm
- Two independent climatic zones
- Wood sliding shelves with soft closing runners

TEMPERATURE RANGES

Climate compartments	2
Temperature ranges	from 39 °F (4 °C) to 64 °F

GENERAL PROPERTIES

Reversible door	YES
Equilance hinge	NO
Soft-Closing glides	YES
Low vibration	YES
OptiView (Led Light Spots)	YES
Shelves	5
Type Of Shelves	WOOD
Full Extension Shelves 90° Door Opening	YES
Full Extension Drawers 90° Door Opening	NO
Defrost Process	AUTOMATIC
Door Open Alarms	YES
Shopping Fridge	NO
Shopping Freezer	NO
Power Failure Alert	YES
Ice Maker With Water Filter	NO
Humidity control	YES
Active carbon filter	YES
Air filter control	YES
Volume Compartment 1 (cbf)	5.1
Total Net Volume (cbf)	5.1
Total Gross Volume (cbf)	5.1
Compartment 1 / Upper wine cellar capacity (bottles)	41
Undercounter bottom wooden bottle holder (bottles)	11
Estimated Yearly Electricity Use	242 kwh

TECHNICAL DETAILS

Total Absorbed Current (A)	2
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	118 1/8" (3 m)
Plug Type	NEMA 5-15P 125V; 15A
Climate Class	SN/T
Noise level (dB)	41
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A


DIMENSIONS & WEIGHT


Height Of The Product (Minimum)	34" (865 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	23 1/2" (598 mm)
Depth Of Product Without Handle	22 5/8" (576 mm)
Cut-out Height	34 1/4" (870 mm)
Cut-out Width	23 5/8" (600 mm)
Cut-out Depth	min 23 5/8" (600 mm)
Net Weight	139 lbs (63 kg)
Gross Weight	172 lbs (78 kg)

BKRUW242SS 24" undercounter wine cellar with Stainless Steel Door

BENESSI


PRODUCT SPECIFICATIONS AND DIMENSIONS

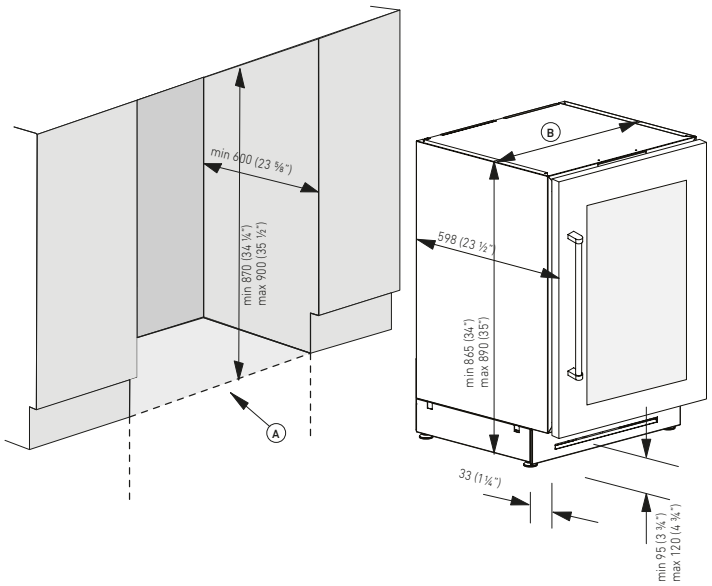

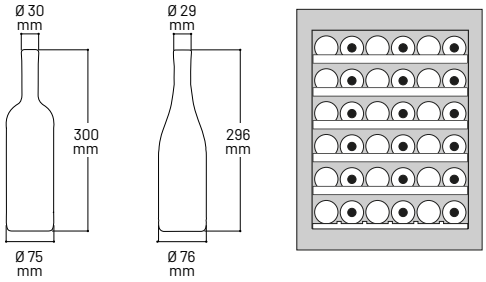



TECHNICAL DATA	
Niche Width **A** (in)	23 5/8"
Unit Width **B** (in)	23 1/2"

FRONT VIEW

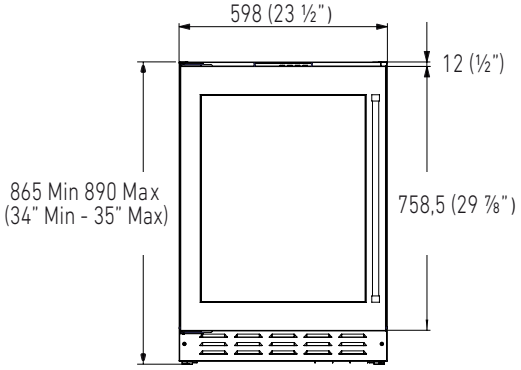

SIDE VIEW

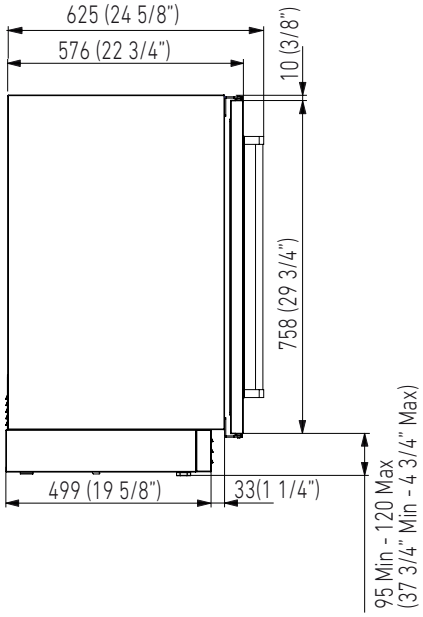


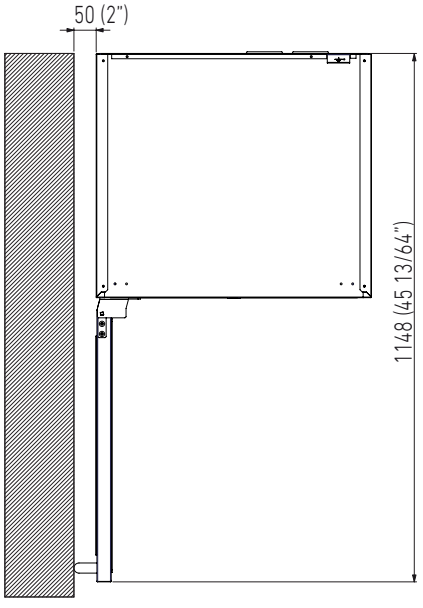

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.


Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment

ELECTRICAL CONNECTION

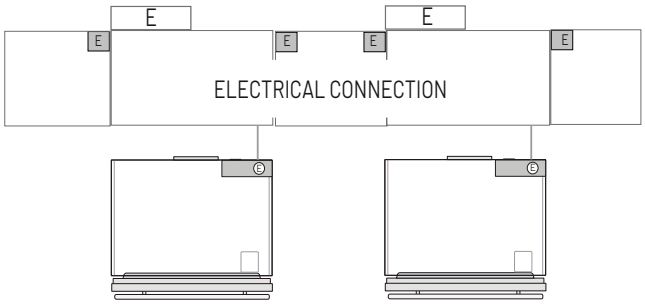

Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

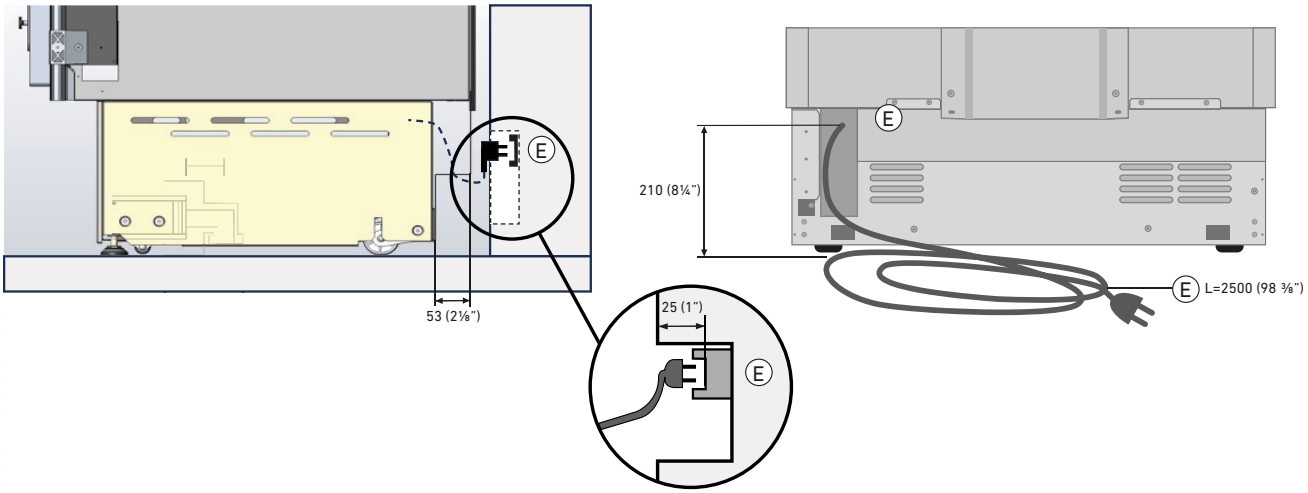

For installation specifications, please consult with Benessi. For optimum installation, we recommend using the actual product as the best guide.